


HOOD WASHER GRILLE INSTALLATION INSTRUCTIONS

TOOLS REQUIRED FOR INSTALLATION: Small flathead screwdriver to assist in prying.

- 1) This installation will be done from inside your hood. Open the hood and unclip the two washer electrical units (A).
- 2) Unclip the central hose clip from the grille (B).
- 3) Remove the hoses from the washer nozzle by separating the area shown in section (C).
- 4) Remove the grille by unclipping the clips around the perimeter of the grille (D).
- 5) Once the grille is removed use a screwdriver to compress the hood washer nozzle clips and pop them out from the grille (E).
- 6) Insert them into your new painted grille. Install and reassemble hood washer components.

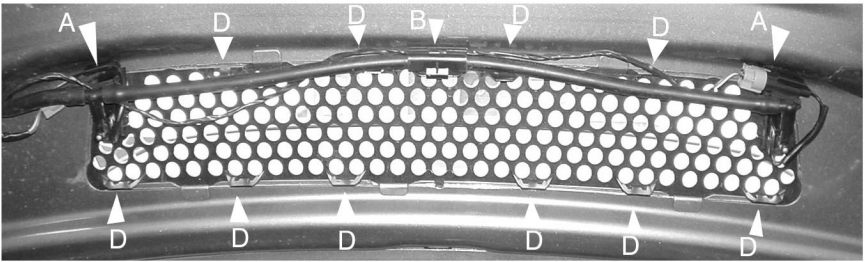

CLOSE UP OF WASHER NOZZLE AREA.

